

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number
WO 2005/067246 A2

(51) International Patent Classification⁷: **H04L 27/26**

(21) International Application Number:
PCT/US2004/043042

(22) International Filing Date:
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/749,902 29 December 2003 (29.12.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MALTSEV, Alexander** [RU/RU]; Verhne-Pecherskaya Street, 1-7, Nizhny Novgorod, 603163 (RU). **SADRI, Ali** [US/US]; 11835 Carmel Mountain Road, Suite 1304-360, San Diego, CA 92128 (US). **SERGEYEV, Sergey** [RU/RU]; Vaneeva Street, 19-28, Nizhny Novgorod, 603105 (RU). **BELONozHKIN, Alexander** [RU/RU]; N.V. Naberezhnaya Street, 1-16, Nizhny Novgorod, 603001 (RU). **SERGEYEV, Vadim** [RU/RU]; Vancev Street, 19-28, Nizhny Novgorod, 603105 (RU).

(74) Agents: **STEFFEY, Charles, E.** et al.; Schwegman, Lundberg, Woessner & Kluth, P.A., P.O. Box 2938, Minneapolis, MN 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: QUASI-PARALLEL MULTICHANNEL RECEIVERS FOR WIDEBAND ORTHOGONAL FREQUENCY DIVISION MULTIPLEXED COMMUNICATIONS AND ASSOCIATED METHODS

(57) Abstract: A quasi-parallel receiver may simultaneously receive signals within several subchannels that comprise a wideband channel. The receiver includes a subchannel filter selection switch that provides a baseband signal to a selected one of a plurality of subchannel low-pass filters. A heterodyne frequency generator provides one of a plurality of heterodyne frequencies to convert an RF signal received within a selected subchannel to the baseband signal. The subchannel low-pass filters accumulate signal information from an associated one of a plurality of subchannels during a filter-input sampling interval. In some embodiments, individual analog-to-digital converters receive the accumulated signal outputs from an associated subchannel filter and generate digital signals for a subsequent Fourier transformation. In some embodiments, a normalized signal output may be provided to the analog-to-digital converters, allowing the use of lower resolution analog-to-digital converters. The analog-to-digital converters may have sampling rates based on the subchannel bandwidth.



WO 2005/067246 A2

QUASI-PARALLEL MULTICHANNEL RECEIVERS FOR WIDEBAND
ORTHOGONAL FREQUENCY DIVISION MULTIPLEXED COMMUNICATIONS
AND ASSOCIATED METHODS

Technical Field

Embodiments of the present invention pertain to wireless electronic communications, and in some embodiments, the present invention pertains to orthogonal frequency division multiplexed communications.

Background

Orthogonal frequency-division multiplexing (OFDM) is an example of a multi-carrier transmission technique that uses symbol-modulated orthogonal subcarriers to transmit information within an available spectrum. Many modern digital communication systems, including wireless local-area networks (WLANs), are using symbol-modulated orthogonal subcarriers as a modulation scheme to help signals survive in environments having multipath reflections and/or strong interference. One problem with many conventional systems that use symbol-modulated subcarriers is that channel bandwidth is limited to the bandwidth of the individual channels. Some conventional wireless communication systems, such as WLANs that implement OFDM communications, communicate using channels that may only have about a 20-MHz bandwidth. Thus, there are general needs for systems and methods for receiving wider bandwidth communications.

Brief Description of the Drawings

The appended claims are directed to some of the various embodiments of the present invention. However, the detailed description presents a more complete understanding of embodiments of the present invention when considered in connection with the figures, wherein like reference numbers refer to similar items throughout the figures and:

FIG. 1 is a block diagram of a receiver in accordance with some embodiments of the present invention;

FIGs. 2A and 2B illustrate subchannel analog-to-digital converter circuitry in accordance with some embodiments of the present invention;

5 FIG. 3 illustrates a heterodyne frequency generator in accordance with some embodiments of the present invention;

FIGs. 4A and 4B illustrate subchannel analog-to-digital converter circuitry with corresponding amplifiers in accordance with some embodiments of the present invention;

10 FIG. 5 illustrates radio-frequency (RF) and front-end circuitry in accordance with some embodiments of the present invention;

FIGs. 6A, 6B and 6C illustrate timing diagrams in accordance with some embodiments of the present invention; and

FIG. 7 is a flow chart of a signal reception procedure in accordance with some embodiments of the present invention.

15

Detailed Description

The following description and the drawings illustrate specific embodiments of the invention sufficiently to enable those skilled in the art to practice them. Other
20 embodiments may incorporate structural, logical, electrical, process, and other changes. Examples merely typify possible variations. Individual components and functions are optional unless explicitly required, and the sequence of operations may vary. Portions and features of some embodiments may be included in or substituted for those of others. The scope of embodiments of the invention encompasses the full ambit of the claims and all
25 available equivalents of those claims. Such embodiments of the invention may be referred to, individually or collectively, herein by the term "invention" merely for convenience and without intending to voluntarily limit the scope of this application to any single invention or inventive concept if more than one is in fact disclosed.

FIG. 1 is a block diagram of a receiver in accordance with some embodiments of
30 the present invention. Receiver 100 may be part of a wireless communication device and may receive orthogonal frequency division multiplexed (OFDM) communication signals. In some embodiments, receiver 100 may receive an OFDM symbol on a wideband communication channel. The wideband channel may comprise one or more subchannels.

The subchannels may be frequency-division multiplexed (i.e., separated in frequency) and may be within a predetermined frequency spectrum. The subchannels may comprise a plurality of orthogonal subcarriers. In some embodiments, the orthogonal subcarriers of a subchannel may be closely spaced OFDM subcarriers. To achieve orthogonality between
5 the closely spaced subcarriers, the subcarriers of a particular subchannel may have a null at substantially a center frequency of the other subcarriers of that subchannel.

In accordance with some embodiments, the subcarriers may have been symbol-modulated in accordance with individual subcarrier modulation assignments. This may be referred to as adaptive bit loading (ABL). Accordingly, one or more bits may be
10 represented by a symbol modulated on a subcarrier. The modulation assignments for an individual subchannel may be based on the channel characteristics or channel conditions for that subcarrier, although the scope of the invention is not limited in this respect. In some embodiments, the subcarrier modulation assignments may range from zero bits per symbol to up to ten or more bits per symbol. In terms of modulation levels, the subcarrier
15 modulation assignments may comprise, for example, binary phase shift keying (BPSK), which communicates one bit per symbol, quadrature phase shift keying (QPSK), which communicates two bits per symbol, 8PSK, which communicates three bits per symbol, 16-quadrature amplitude modulation (16-QAM), which communicates four bits per symbol, 32-QAM, which communicates five bits per symbol, 64-QAM, which communicates six
20 bits per symbol, 128-QAM, which communicates seven bits per symbol, and 256-QAM, which communicates eight bits per symbol. Modulation assignments with higher communication rates per subcarrier may also be received.

An OFDM symbol may be viewed as the combination of the symbols modulated on the individual subcarriers. Because of the variable number of bits per symbol
25 modulated on a subcarrier and the variable number of subchannels that may comprise a wideband channel, the number of bits per OFDM symbol may vary greatly.

In accordance with some embodiments, receiver 100 receives radio frequency (RF) signals through RF and front-end circuitry 102. Circuitry 102 may filter the RF signals received through antenna 142 with band-pass filter (BPF) 144. Circuitry 102 may also
30 amplify the RF signals with low-noise amplifier (LNA) 148. RF signals 103 provided by circuitry 102 may be downconverted to baseband (e.g., zero-frequency) by in-phase (I) mixer 104 based on heterodyne frequency 117 generated by heterodyne frequency

generator 116. The baseband signals for the I-channel may be amplified by baseband amplifier 106.

Subchannel filter selection switch 108 may couple baseband signals 107 to a selected one of a plurality of subchannel low-pass filters 110. Subchannel low pass filters 110 may accumulate signal information from an associated one of the subchannels during a filter-input sampling interval. During the filter-input sampling interval, heterodyne frequency generator 116 provides one of a plurality of heterodyne frequencies to convert RF signal 103, which may be received within a selected subchannel, to baseband signal 107. This may allow the downconversion of the proper subchannel frequency to baseband. The accumulated signal information from each subchannel may be individually provided by subchannel filters 110 to analog-to-digital converter circuitry 126 for conversion to digital signals 115.

For the quadrature-phase (Q) channel component, RF signals 103 may be downconverted to baseband (e.g., zero-frequency) by mixer 154 based on heterodyne frequency 119 generated by heterodyne frequency generator 116. Heterodyne frequency 119 may be shifted in phase by substantially ninety degrees by phase shifter 118. The baseband signals may be amplified by baseband amplifier 156. Subchannel filter selection switch 158 may couple the baseband signals to a selected one of a plurality of subchannel low-pass filters 160. Subchannel low-pass filters 160 may accumulate signal information from an associated one of the subchannels during a filter-input sampling interval. The accumulated signal information from each subchannel may be individually provided by subchannel filters 160 to analog-to-digital converter circuitry 166 for conversion to digital signals 165.

Digital signal processor (DSP) 120 may, among other things, perform fast Fourier transforms (FFTs) for each subchannel on digital signals 115 and 165 (i.e., both the I and the Q channel components). In some embodiments, FFT circuitry of DSP 120 may generate a parallel group of time-domain samples for each symbol-modulated subcarrier that may comprise each of the subchannels. In some embodiments, DSP 120 may include a plurality of FFT processing elements.

In some embodiments, DSP 120 may include an FFT processing element for each subchannel. In these embodiments, an FFT for each subchannel may be performed for an OFDM symbol received over a subchannel.

In other embodiments in which receiver 100 operates as a genuine multichannel receiver, FFTs may be performed for OFDM symbols received over more than one subchannel. In these embodiments, the FFTs do not need to start their processing simultaneously.

5 In some embodiments, system controller 122 may generate subchannel selection signal 124 for use by subchannel filter selection switches 108 and 158 and for use by heterodyne frequency generator 116. In these embodiments, the selected subchannel low-pass filter may be associated with a selected subchannel. Heterodyne frequency generator 116 may be responsive to subchannel selection signal 124 to generate one of a plurality of
10 heterodyne frequencies to downconvert RF signals 103 within a corresponding one of the subchannels during a filter-input sampling interval. Subchannel filter selection switch 108 may also be responsive to subchannel selection signal 124 to switch among subchannel low-pass filters 110, allowing each subchannel filter to accumulate signal information received from an associated subchannel during the filter-input sampling interval. In some
15 embodiments, the subchannel low-pass filters may work in parallel separately accumulating signal information from each subchannel. In some embodiments, subchannel filter selection switches 108 and 158 may provide signal energy to the selected subchannel low-pass filter during a filter-input sampling interval, allowing the selected subchannel filter to accumulate signal information and update its state.

20 In some embodiments, the filter-input sampling interval may occur for each subchannel at least as often as the inverse of a bandwidth of the subchannel, although the scope of the present invention is not limited in this respect. The filter-input sampling interval may be selected to help assure that signal information from the subchannels is not lost during the sampling of the other subchannels. In some embodiments that have
25 approximately 20-MHz subchannels, a filter-input sampling interval may occur at least once every 50 ns allowing signal information to be accumulated for each subchannel once every 50 ns, although the scope of the present invention is not limited in this respect.

In some embodiments, receiver 100 may be a wideband channel receiver for receiving OFDM signals in a wideband channel comprising one or more of the frequency-
30 separated subchannels. In these embodiments, each subchannel low-pass filter may be associated with one of the subchannels. In some embodiments, the subchannel low-pass filters may have a filter bandwidth of approximately half the subchannel bandwidth. For example, when the subchannels have a subchannel bandwidth of approximately 20-MHz,

the subchannel low-pass filters have a 3 dB filter bandwidth of approximately 10-MHz, although the scope of the invention is not limited in this respect.

In some embodiments, each of subchannel low-pass filters 110 and each of subchannel low-pass filters 160 may be substantially identical. For example, in some
5 embodiments, all subchannel low-pass filters may have the same cutoff frequency and discrimination order, and they may be of the same filter type. Examples of suitable filter types include elliptical filters, Tchebyshev filters, and Butterworth filters, although the scope of the invention is not limited in this respect.

In some embodiments, analog-to-digital converter circuitry 126 may comprise
10 whole-channel analog-to-digital converter 114 and subchannel filter output selection switch 112 (i.e., for the in-phase channel components). In these embodiments, analog-to-digital converter circuitry 166 may comprise whole-channel analog-to-digital converter 164 and subchannel filter output selection switch 162 (i.e., for the quadrature-phase channel components). Subchannel filter output selection switch 112 may be responsive to
15 subchannel filter output selection signal 125 and may provide an accumulated signal output from a selected one of subchannel low-pass filters 110 to whole-channel analog-to-digital converter 114. Subchannel filter output selection switch 162 may also be responsive to subchannel filter-output selection signal 125 and may provide an accumulated signal output from a selected one of subchannel low-pass filters 160 to
20 whole-channel analog-to-digital converter 164. In some embodiments when the wideband channel comprises up to four or more subchannels, whole-channel analog-to-digital converters 114 and 164 may comprise at least 9-bit analog-to-digital converters having a sampling rate of at least as great as a bandwidth of the wideband channel. In the case of an up to 80-MHz wideband channel, whole-channel analog-to-digital converters 114 and 164
25 may have sampling rates of at least 80-MSPS, although the scope of the invention is not limited in this respect.

Whole-channel analog-to-digital converters 114 and 164 may generate a combination (i.e., not the sum) of signals sampled from the subchannels. For example, in the case of four subchannels, every fourth (time-domain) sample provided by whole-
30 channel analog-to-digital converters 114 and 164 may be associated with the same subchannel. As an example, whole-channel analog-to-digital converters 114 and 164 may be suitable for providing samples from four 20-MHz subchannels, two 40-MHz

subchannels, one 80-MHz wideband channel, although the scope of the invention is not limited in this respect.

Subchannel filter output selection signal 125 may cause switch 112 to switch between outputs of subchannel low-pass filters 110 and may cause switch 162 to switch
5 between outputs of subchannel low-pass filters 160 allowing subchannel low pass filters 110 and 160 to be sampled at least once every filter-output sampling interval. The filter-output sampling interval is explained in more detail below.

Although whole-channel analog-to-digital converters 114 and 164 are illustrated as having an 11-bit resolution, this is not a requirement and whole-channel analog-to-digital
10 converters 114 and 164 with lower or greater resolutions may also be suitable. Embodiments which receive a greater number of subchannels may utilize whole-channel analog-to-digital converters 114 and 164 with greater resolutions and/or sampling rates. In other embodiments, discussed in more detail below, a single-channel ADC may be used for each subchannel with lower sampling rates and/or lower resolutions, which may help
15 reduce cost, among other things.

In some embodiments, receiver 100 may determine which subchannels of a wideband channel are being used to convey an OFDM symbol. In these embodiments, signal detectors may be utilized at the output of subchannel low-pass filters 110, 160 to detect which of the subchannels are simultaneously conveying information. Further signal
20 processing, including analog-to-digital conversion, may be refrained from being performed on inactive subchannels.

In some embodiments, RF and front-end circuitry 102 may comprise attenuator 146 in the RF signal path responsive to subchannel selection signal 124 to attenuate the RF signal. The attenuation level may be selected on a per-subchannel basis to provide a
25 normalized signal level for the analog-to-digital conversion in circuitry 126 and 166. The use of a normalized signal level across the subchannels may allow the use of lower resolution analog-to-digital converters.

In some embodiments, heterodyne frequency generator 116 comprises fixed-frequency voltage-controlled oscillator (VCO) 132 to generate a constant reference
30 frequency, and a direct digital synthesizer (DDS) 134 to generate a selected one of a plurality of stepped frequencies in response to subchannel selection signal 124. Heterodyne frequency generator 116 may also comprise frequency combiner 136 to combine the reference frequency and the selected one of the stepped frequencies to

generate heterodyne frequency 117 to downconvert RF signals within the selected subchannel to baseband signals. In some embodiments, heterodyne frequency generator 116 may further comprise phase-locked loop (PLL) synthesizer 140 and frequency divider 138 to operate with VCO 132 to generate heterodyne frequency 117. Other configurations for selectively generating heterodyne frequencies may also be suitable for use with embodiments of the present invention. In some embodiments in which subchannels are separated in frequency by approximately 20-MHz, the stepped frequencies generated by DDS 134 may be in 20-MHz steps, although the scope of the invention is not limited in this respect.

In some embodiments, the frequency spectrums for a wideband channel may comprise subchannels in either a 5 GHz frequency spectrum or a 2.4 GHz frequency spectrum. In these embodiments, the 5 GHz frequency spectrum may include frequencies ranging from approximately 4.9 to 5.9 GHz, and the 2.4 GHz spectrum may include frequencies ranging from approximately 2.3 to 2.5 GHz, although the scope of the invention is not limited in this respect, as other frequency spectrums are also equally suitable.

In some embodiments, receiver 100 may be part of a personal digital assistant (PDA), a laptop or portable computer with wireless communication capability, a web tablet, a wireless telephone, a wireless headset, a pager, an instant messaging device, an MP3 player, a digital camera, an access point or other device that may receive and/or transmit information wirelessly. In some embodiments, receiver 100 may receive RF communications in accordance with specific communication standards, such as the IEEE 802.11(a), 802.11(b), 802.11(g/h) and/or 802.16 standards for wireless local area networks, although receiver 100 may also be suitable to receive communications in accordance with other techniques including the Digital Video Broadcasting Terrestrial (DVB-T) broadcasting standard, and the High performance radio Local Area Network (HiperLAN) standard. Antenna 142 may comprise one or more directional or omnidirectional antennas, including, for example, dipole antennas, monopole antennas, loop antennas, microstrip antennas or other type of antenna or combination thereof suitable for reception of RF signals within a frequency spectrum to be received by receiver 100.

Although embodiments of the present invention are described as being suitable for reception and processing of OFDM signals, the scope of the present invention is not

limited in this respect. Other embodiments may be suitable for receiving and processing signals having other types of modulation formats.

Although receiver 100 is illustrated as having several separate functional elements, one or more of the functional elements may be combined and may be implemented by combinations of software-configured elements, such as processing elements including digital signal processors (DSPs), and/or other hardware elements. For example, processing elements may comprise one or more microprocessors, DSPs, application specific integrated circuits (ASICs), and combinations of various hardware and logic circuitry for performing at least the functions described herein.

FIGs. 2A and 2B illustrate subchannel analog-to-digital converter circuitry in accordance with some embodiments of the present invention. In these embodiments, analog-to-digital converter circuitry 226 may be suitable for use as analog-to-digital converter circuitry 126 (FIG. 1), and analog-to-digital converters 266 may be suitable for use as analog-to-digital converter circuitry 166 (FIG. 1). In these embodiments, analog-to-digital converter circuitry 226 may comprise a plurality of individual subchannel analog-to-digital converters 214 for the I-phase channel components, and analog-to-digital converter circuitry 266 may comprise a plurality of individual subchannel analog-to-digital converters 264 for the Q-phase channel components. Each subchannel analog-to-digital converter 214 may receive an accumulated signal output from a corresponding one of subchannel low-pass filters 110 (FIG. 1), and each subchannel analog-to-digital converter 264 may receive an accumulated signal output from a corresponding one of subchannel low-pass filters 160 (FIG. 1).

In some embodiments, individual subchannel analog-to-digital converters 214 and 264 may comprise at least 9-bit analog-to-digital converters having sampling rates of at least as great as a bandwidth of a subchannel. In some embodiments in which the subchannels have bandwidths of approximately 20-MHz, the sampling rate may be at least 20 MSPS. Although individual subchannel analog-to-digital converters 214 and 264 are illustrated as 11-bit individual subchannel analog-to-digital converters, this is not a requirement and embodiments of the present invention may be implemented with individual subchannel analog-to-digital converters having lower or greater resolutions.

The resolutions of individual subchannel analog-to-digital converters 214 and 264 may be estimated from the modulation order and the number of subcarriers of a subchannel. In the case of 64-QAM modulation, for each of the subcarriers, at least three

bits of resolution for each I and Q component may be required. When a subchannel includes forty-eight data subcarriers, six additional bits of resolution may be required (e.g., the ceiling of base 2 log of 48). Accordingly, in this example, approximately nine bits of resolution may be provided by each of individual subchannel analog-to-digital converters 214 and 264. Additional resolution may be added for improved noise handling, and a soft decision capability may also be added for decoding. In general, a conventional “single” channel receiver, which may process a wideband channel as a single channel, may require an additional 2-bit (four times) resolution to achieve similar accuracy. This may be significantly more expensive.

In some embodiments, an attenuation level provided by an attenuator, such as attenuator 146 (FIG. 1), may be selected on a per-subchannel basis to provide a normalized signal level for the selected subchannel filter and a corresponding one of the subchannel analog-to-digital converters 214 and 264. The normalized subchannel signal levels may allow the use of lower resolution analog-to-digital converters.

The use of individual subchannel analog-to-digital converters, instead of a single analog-to-digital converter, such as whole-channel analog-to-digital converters 114 (FIG. 1) and 164 (FIG. 1), may allow the use of analog-to-digital converters with lower sampling rates and/or lower resolutions. This may help significantly reduce manufacturing costs.

FIG. 3 illustrates a heterodyne frequency generator in accordance with some embodiments of the present invention. Heterodyne frequency generator 316 may be suitable for use as heterodyne frequency generator 116 (FIG. 1), although other heterodyne frequency generators may also be suitable. Heterodyne frequency generator 316 comprises a plurality of individual heterodyne frequency generators 302, each of which may include fixed-frequency voltage-controlled oscillator (VCO) 332. Each fixed-frequency voltage-controlled oscillator 332 may generate a single heterodyne frequency for downconverting a particular subchannel. Heterodyne frequency generator 316 may also comprise subchannel heterodyne switch 304 to select a heterodyne frequency from one of individual heterodyne frequency generators 302 in response to subchannel selection signal 324. In some embodiments, subchannel selection signal 324 may correspond to subchannel selection signal 124 (FIG. 1).

In some embodiments, each of individual heterodyne frequency generators 302 may comprise phase-locked loop synthesizer 340 and frequency divider 338 to operate

with voltage-controlled oscillator 332 to generate the heterodyne frequency. Other configurations for selectively generating heterodyne frequencies are also suitable for use with embodiments of the present invention.

FIGs. 4A and 4B illustrate subchannel analog-to-digital converter circuitry with corresponding amplifiers in accordance with some embodiments of the present invention. In these embodiments, analog-to-digital converter circuitry 426 may be suitable for use as analog-to-digital converter circuitry 126 (FIG. 1), and analog-to-digital converter circuitry 466 may be suitable for use as analog-to-digital converter circuitry 166 (FIG. 1). In these embodiments, analog-to-digital converter circuitry 426 may comprise a plurality of individual subchannel analog-to-digital converters 414 and associated amplifiers 412 for the I-phase channel components, and analog-to-digital converter circuitry 466 may comprise a plurality of individual subchannel analog-to-digital converters 464 and associated amplifiers 462 for the Q-phase channel components. Each subchannel analog-to-digital converter 414 may receive an amplified accumulated signal output from a corresponding one of subchannel low-pass filters 110 (FIG. 1), and each subchannel analog-to-digital converter 464 may receive an amplified accumulated signal output from a corresponding one of subchannel low-pass filters 160 (FIG. 1).

In accordance with some embodiments, amplifiers 412 and 462 may amplify the accumulated signal outputs based on gain control signals 402 for each subchannel. In these embodiments, an attenuator in the RF signal path, such as attenuator 146 (FIG. 1), is not necessarily required because the gain of amplifiers 412 and 462 may be set to provide a normalized signal level to the analog-to-digital converters.

In some embodiments, the individual subchannel analog-to-digital converters 414 and 464 may comprise at least 9-bit analog-to-digital converters having sampling rates of at least as great as a bandwidth of a subchannel. In some embodiments in which the subchannels have bandwidths of approximately 20-MHz, the sampling rate of the analog-to-digital converters may be at least approximately 20 MSPS. The use of gain control signals 402 to normalize the output may allow the use of lower resolution analog-to-digital converters. Although individual subchannel analog-to-digital converters 414 and 464 are illustrated as having a resolution of 11-bits, this is not a requirement. Individual subchannel analog-to-digital converters 414 and 464 with greater and lesser resolutions may also be suitable.

FIG. 5 illustrates RF and front-end circuitry in accordance with some embodiments of the present invention. RF and front-end circuitry 502 may be suitable for use as RF and front-end circuitry 102 (FIG. 1), although other circuitry may also be suitable. In these embodiments, a receiver, such as receiver 100 (FIG. 1), may utilize more than one of
5 spatially-diverse antennas 542 to “divide” a single subchannel into one or more spatial channels. In some embodiments, each antenna 542 may receive signals from one spatial channel. In some embodiments, each spatial channel may be used to communicate separate or independent data streams on the same subcarriers as the other spatial channels, allowing the reception of additional data without an increase in frequency bandwidth. In
10 other embodiments, each spatial channel may be used to communicate the same data as the other spatial channels. In these embodiments, the use of spatial channels may take advantage of the multipath characteristics of a particular subchannel. In some embodiments, the spatial channels may be non-orthogonal channels (e.g., may overlap in frequency and or time) and in some embodiments, each spatial channel may use the same
15 subcarriers as the other spatial channels.

In some embodiments, an OFDM symbol may be received over a single subchannel comprising a plurality of spatial channels. Each spatial channel may comprise the same set of orthogonal subcarriers. In some embodiments, a single subchannel may have a bandwidth of approximately 20-MHz, although the scope of the invention is not
20 limited in this respect.

In some embodiments, RF circuitry 502 may comprise antenna selection switch 540 to select one of antennas 542 in response to spatial channel selection signal 524. In these embodiments, which may be referred to as open-loop multiple-input, multiple-output (MIMO) embodiments, each of antennas 542 may correspond to one of the spatial
25 channels. In some embodiments, circuitry 502 may filter the RF signals received through antennas 542 with an associated one of band-pass filters (BPFs) 544, although the scope of the invention is not limited in this respect. In some embodiments, each of subchannel low-pass filters 110 (FIG. 1) may be associated with one of the spatial channels, and each of subchannel low-pass filters 160 (FIG. 1) may also be associated with one of the spatial
30 channels. In these embodiments, the individual subchannel low-pass filters may accumulate signal information from a particular spatial channel during a filter-input sampling interval. Spatial channel selection signal 524 may correspond to subchannel

selection signal 124 (FIG. 1) and may cause antenna selection switch 540 to select an antenna for receiving each spatial channel during the filter-input sampling interval.

In some embodiments, which may be referred to as closed-loop MIMO embodiments, the spatial channels may be orthogonal spatial channels, and a one-to-one correspondence between antennas 542 and spatial channels is not required. In these
5 embodiments, the orthogonal spatial channels may be generated with beamforming techniques at the transmitter, and received using beamforming techniques at the receiver. In these embodiments, DSP 120 (FIG. 1) may be configured to perform receiving beamforming to extract the information from the orthogonal spatial channels, which can
10 be referred to as orthogonalization of spatial channels. The use of orthogonal spatial channels may help reduce crosstalk between spatial channels in comparison with open-loop embodiments.

In some embodiments, a heterodyne frequency generator may provide a single heterodyne frequency to convert RF signals of the single frequency subchannel to
15 baseband signals. The spatial channel low-pass filters may accumulate signal information for a corresponding one of the spatial channels during the appropriate filter-input sampling interval.

FIGs. 6A, 6B and 6C illustrate timing diagrams in accordance with some embodiments of the present invention. FIG. 6A qualitatively depicts two consecutive 50 ns
20 sampling intervals. Each 50 ns time interval may be a filter-input sampling interval and may include a sampling subinterval for each subchannel. First filter-input sampling interval 602 may be at the end of a current OFDM symbol, and filter-input sampling interval 604 may be at the beginning of a next OFDM symbol. In this example, receiver 100 (FIG. 1) may receive four signals 606, 608, 610 and 612 from four subchannels
25 simultaneously. Signal 614 illustrates the sum of signals 606, 608, 610 and 612, which may be viewed as the overall signal coming on a wideband channel (which is 80-MHz in this example).

Signal 606 during filter-input sampling subinterval 616 (i.e., from 0 ns to 12.5 ns) may be downconverted to baseband using a controlled heterodyne frequency. During
30 sampling subinterval 616, both I and Q subchannel filter selection switches 108 and 158 may connect their outputs respectively to a first subchannel low-pass filter (for both the I and Q channel components, respectively) and the baseband signals from the first subchannel are filtered.

In next filter-input sampling subinterval 618 (i.e., from 12.5 ns to 25 ns), signal 608 may be downconverted to baseband using a controlled heterodyne, and both I and Q subchannel filter selection switches 108 and 158 may connect their outputs to a second subchannel low-pass filter (for both the I and Q channel components, respectively), and the baseband signals from the second subchannel are filtered.

In the next filter-input sampling subinterval 620 (i.e., from 25 ns to 37.5 ns), signal 610 may be downconverted to baseband using a controlled heterodyne, and both I and Q subchannel filter selection switches 108 and 158 may connect their outputs to a third subchannel low-pass filter (for both the I and Q channel components, respectively), and the baseband signals from the third subchannel are filtered.

In the next filter-input sampling subinterval 622 (i.e., from 37.5 ns to 50 ns), signal 612 may be downconverted to baseband using a controlled heterodyne, and both I and Q subchannel filter selection switches 108 and 158 may connect their outputs to a fourth subchannel low-pass filter (for both the I and Q channel components, respectively), and the baseband signals from the fourth subchannel are filtered.

This process may be performed for each subchannel and is not limited to the example of four subchannels. This process may also be repeated at least as often as the inverse of the bandwidth of a subchannel, although the scope of the invention is not limited in this respect.

Wideband signal processing with a synchronous switching of heterodyne frequency and subchannel low-pass filters may result in the subchannel low-pass filter output signal level to be just about the same as if it were obtained using a separate subchannel receiver for each subchannel normalized for the associated subchannel. In some cases when there are four subchannels, the subchannel low-pass filter output level may be about four-times less than the output level of a low-pass filter in an equivalent single subchannel receiver, because about one-fourth of the signal energy is accumulated by the subchannel low-pass filters. Little or no signal-to-noise ratio (SNR) degradation may occur, because the noise power may also be reduced by a factor of about four, keeping the SNR about the same as for a single subchannel receiver. In some embodiments of the present invention, power loss may be compensated by providing additional gain before subchannel low-pass filters 110 (FIG. 1) and 160 (FIG. 1). Circuitry 426 (FIG. 4A) and circuitry 466 (FIG. 4B) illustrate examples of this, although the scope of the invention is not limited in this respect.

Although filter-input sampling intervals 602 and 604 are 50 ns intervals illustrated as having four sampling subintervals of 12.5 ns, this is not a requirement as it illustrates embodiments having four 20-MHz bandwidth subchannels comprising a wideband channel of having an 80-MHz bandwidth. Accordingly, the scope of the present invention is not limited in this respect. In some embodiments, the length of intervals 602 and 604 depend on the subchannel bandwidth, and the number of sampling subintervals may depend on the number of subchannels in a wideband channel.

FIG. 6B illustrates attenuator signal output in accordance with some embodiments of the present invention. Signal levels received on different subchannels may have different average power levels, which may result in different signal levels at the output of the subchannel low-pass filters. Higher resolution analog-to-digital converters are generally required to digitize such signals. Higher resolution analog-to-digital converters tend to be very expensive. In some embodiments, a per-subchannel automatic gain control may be implemented with an attenuator, such as attenuator 146 (FIG. 1). As illustrated in FIG. 6B, attenuator output signal 624 during subinterval 616 may provide an attenuation level to normalize the input signal to a first subchannel low-pass filter to within the dynamic range of a subsequent analog-to-digital converter. During subinterval 618, the attenuator output signal may be changed based on the signal level from the next subchannel. This process may be performed during a filter-input sampling interval for each subchannel and may provide a more normalized output for analog-to-digital conversion, allowing the use of lower resolution analog-to-digital converter circuitry.

In alternate embodiments, instead of a selectable attenuator in the RF signal path, baseband amplifiers with automatic gain control may be provided before the subchannel low-pass filters. An example of this is illustrated in FIGs. 4A and 4B.

FIG. 6C illustrates baseband signal inputs to subchannel low-pass filters in accordance with embodiments of the present invention. Baseband signal inputs 626, 628, 630 and 632 may correspond respectively to subchannel signals 606, 608, 610 and 612 received respectively during sampling subintervals 616, 618, 620 and 622. As illustrated, baseband signal inputs 626, 628, 630 and 632 may be normalized to within the range of a subsequent analog-to-digital converter. Subchannel signals 606, 608, 610 and 612 are also illustrated as being sampled respectively during sampling subintervals 634, 636, 638 and 640 of next interval 604 at the beginning of the next OFDM symbol. In some embodiments, the sampling for a subchannel may be repeated at least as often as the

inverse of a bandwidth of a subchannel, although the scope of the present invention is not limited in this respect. The filter-input sampling interval may be selected to help assure that signal information from the subchannels is not lost during the sampling of the other subchannels. In the examples illustrated in FIGs. 6A, 6B and 6C with 20-MHz

5 subchannels, a sampling interval may occur for each subchannel at least once every 50 ns, although the scope of the invention is not limited in this respect.

FIG. 7 is a flow chart of a signal reception procedure in accordance with some embodiments of the present invention. Procedure 700 may be performed by a receiver, such as receiver 100 (FIG. 1) to receive an OFDM symbol over one or more subchannels
10 comprising a wideband channel.

In operation 702, RF circuitry of a receiver may simultaneously receive RF signals over one or more subchannels. Operation 702 may be performed by RF circuitry 102 (FIG. 1), although the scope of the invention is not limited in this respect.

In operation 704, a heterodyne frequency may be generated to downconvert the RF
15 signals in the first subchannel to baseband. The proper heterodyne frequency may be generated for the first subchannel in response to a subchannel selection signal which may select the first subchannel. In some embodiments, baseband signals for an I-channel and Q-channel may be generated. Operation 704 may be performed by heterodyne frequency generator 116 (FIG. 1), although the scope of the invention is not limited in this respect.

20 In operation 706, the baseband signals may be provided to a subchannel low-pass filter associated with the first subchannel. A subchannel filter selection switch may be responsive to the subchannel filter input selection signal to provide the baseband signal to the proper subchannel low-pass filter. Operation 706 may be performed by subchannel filter selection switches 108 and 158 (FIG. 1), although the scope of the invention is not
25 limited in this respect.

In operation 708, the selected subchannel low-pass filter may accumulate signal information from the baseband signal during a portion of a filter-input sampling interval. During the filter-input sampling interval time, the selected subchannel low-pass filter may update its state. Operation 708 may be performed during a portion of the filter-input
30 sampling interval which may be repeated at least as often as the inverse of the subchannel bandwidth. Operation 708 may be performed by one of subchannel low-pass filter 110 (FIG. 1) for the I-channel component, and one of subchannel low-pass filters 160 (FIG. 1)

for the Q-channel component, although the scope of the invention is not limited in this respect.

Operation 710 performs an analog-to-digital conversion on the accumulated signal output of the first subchannel low-pass filter. Operation 710 may be performed by analog-to-digital conversion circuitry 126 (FIG. 1) for the I-channel component, and analog-to-digital conversion circuitry 166 (FIG. 1) for the Q-channel component, although the scope of the invention is not limited in this respect. In some embodiments, operation 710 may perform an analog-to-digital conversion on the accumulated signal output of the first subchannel low-pass filter during a filter-output sampling interval.

Operation 712 generates the subchannel filter input selection signal to switch to a next subchannel, and operations 704 through 708 may be repeated for the next subchannel. The subchannel selection signal may be generated by a system controller, such as system controller 122 (FIG. 1), although the scope of the invention is not limited in this respect. Operations 704 through 708 may be performed for each subchannel during the subchannel input sampling interval. Operation 710, on the other hand, may be performed for each subchannel for each filter-output sampling interval. The filter-input sampling interval and the subchannel output sampling interval may be at least as great as the inverse of subchannel bandwidth. In the case of 20-MHz subchannels, these sampling intervals may occur less than about every 50 ns, allowing operations 704 through 710 to be performed for each subchannel, at least once every 50 ns. Although subchannel input sampling interval and the subchannel output sampling interval may be equal, nothing requires this. Subchannel output sampling interval may be based on a multiple of the subchannel bandwidth to allow FFT processing. Subchannel input sampling interval may be selected to, among other things, decrease unwanted impulse disturbances from the RF portion of receiver 100 (FIG. 1) to the ADCs and the DSP.

Once enough samples are received, operation 714 performs an FFT on the digital signals generated from the subchannels (and for both the I and Q channel components) to demodulate an OFDM symbol for subsequent use in generating a decoded bit stream. Operation 714 may be performed by DSP 120 (FIG. 1), although the scope of the invention is not limited in this respect.

In some embodiments, procedure 700 may further comprise selecting an attenuation level in response to the subchannel selection signal to provide a normalized baseband signal level at the inputs of the subchannel low-pass filters. In other

embodiments, procedure 700 may further comprise providing a gain control signal to baseband amplifiers to normalize the baseband signal level inputs of the subchannel low-pass filters.

5 In some other embodiments, procedure 700 may be performed by a receiver to receive an OFDM symbol over a single subchannel comprising a plurality of spatial channels. In these embodiments, each of a plurality of spatially diverse antennas may receive signals from one spatial channel. In some embodiments, each spatial channel may be used to communicate separate or independent data streams on the same subcarriers as the other spatial channels, allowing the reception of additional data without an increase in
10 frequency bandwidth. In other embodiments, each spatial channel may be used to communicate the same data as the other spatial channels.

Although the individual operations of procedure 700 are illustrated and described as separate operations, one or more of the individual operations may be performed concurrently, and nothing requires that the operations be performed in the order
15 illustrated.

Embodiments of the invention may be implemented in one or a combination of hardware, firmware and software. Embodiments of the invention may also be implemented as instructions stored on a machine-readable medium, which may be read and executed by at least one processor to perform the operations described herein. A machine-readable
20 medium may include any mechanism for storing or transmitting information in a form readable by a machine (e.g., a computer). For example, a machine-readable medium may include read-only memory (ROM), random-access memory (RAM), magnetic disk storage media, optical storage media, flash-memory devices, electrical, optical, acoustical or other form of propagated signals (e.g., carrier waves, infrared signals, digital signals, etc.), and
25 others.

The Abstract is provided to comply with 37 C.F.R. Section 1.72(b) requiring an abstract that will allow the reader to ascertain the nature and gist of the technical disclosure. It is submitted with the understanding that it will not be used to limit or interpret the scope or meaning of the claims.

30 In the foregoing detailed description, various features are occasionally grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed embodiments of the subject matter require more features than are expressly recited in each

claim. Rather, as the following claims reflect, invention lies in less than all features of a single disclosed embodiment. Thus the following claims are hereby incorporated into the detailed description, with each claim standing on its own as a separate preferred embodiment.

CLAIMS

What is claimed is:

1. A receiver comprising:

5 a subchannel filter selection switch to provide a baseband signal to a selected one of a plurality of subchannel low-pass filters; and

a heterodyne frequency generator to provide one of a plurality of heterodyne frequencies to convert a radio-frequency signal received within a selected subchannel to the baseband signal,

10 wherein the subchannel low-pass filters are to accumulate signal information from an associated one of a plurality of subchannels during a filter-input sampling interval.

2. The receiver of claim 1 further comprising a system controller to generate a subchannel selection signal for the subchannel filter selection switch and the heterodyne frequency generator,

15 wherein the selected one of the subchannel low-pass filters corresponds to the selected subchannel of the plurality of subchannels,

wherein the heterodyne frequency generator is responsive to the subchannel selection signal to generate one of the heterodyne frequencies to convert radio-frequency signals within a corresponding one of the subchannels within the filter-input sampling interval,

20 wherein the subchannel filter selection switch is responsive to the subchannel selection signal to switch between the subchannel low-pass filters, and

wherein the filter-input sampling interval is to occur at least as often as the inverse of a bandwidth of a subchannel.

25 3. The receiver of claim 1 wherein the receiver is a wideband channel receiver further comprising radio-frequency circuitry to receive orthogonal frequency division multiplexed signals in a wideband channel comprising a plurality of subchannels,

wherein each subchannel low-pass filter corresponds to one of the plurality of subchannels,

30 wherein the subchannels have a subchannel bandwidth, and

wherein the subchannel low-pass filters have a filter bandwidth of approximately half the subchannel bandwidth.

4. The receiver of claim 1 wherein the receiver further comprises:

a whole-channel analog-to-digital converter; and

5 a subchannel filter output selection switch responsive to a subchannel filter output selection signal to provide an accumulated signal output from the selected subchannel low-pass filter to the whole-channel analog-to-digital converter.

5. The receiver of claim 4 wherein a wideband channel comprises up to four of the subchannels, the subchannels having bandwidths of approximately 20-MHz,

10 wherein the whole-channel analog-to-digital converter comprises at least a 9-bit analog-to-digital converter having a sampling rate of at least as great as a bandwidth of the wideband channel,

and wherein the heterodyne frequency generator is to generate heterodyne frequencies during a filter-input sampling interval for each subchannel, the filter-input sampling interval being at least as great as the inverse of the bandwidth of the subchannels, and

15 wherein the subchannel filter output selection switch responsive to the subchannel filter output selection signal provides accumulated signal outputs from each of the subchannel low-pass filters to the whole-channel analog-to-digital converter once for each filter-output sampling interval, the filter-output sampling interval being at least as great as the inverse of the bandwidth of the subchannels.

6. The receiver of claim 1 further comprising a plurality of subchannel analog-to-digital converters, the subchannel analog-to-digital converters to receive an accumulated signal output from a corresponding one of the subchannel low-pass filters.

25 7. The receiver of claim 6 wherein the subchannels have bandwidths of approximately 20-MHz,

wherein the subchannel analog-to-digital converters comprise at least 9-bit analog-to-digital converters having sampling rates of at least as great as a bandwidth of the subchannel, and

wherein the heterodyne frequency generator is to generate heterodyne frequencies or each subchannel during a filter-input sampling interval, the sampling interval being at least as great as the inverse of the bandwidth of the subchannels.

8. The receiver of claim 6 further comprising an attenuator in a radio-frequency
5 signal path responsive to the subchannel selection signal to attenuate the radio-frequency signal and provide a normalized signal level for the selected subchannel filter and a corresponding one of the subchannel analog-to-digital converters.

9. The receiver of claim 1 wherein the heterodyne frequency generator comprises:
a fixed-frequency voltage-controlled oscillator to generate a reference frequency;
10 a digital synthesizer to generate a selected one of a plurality of stepped frequencies in response to a subchannel selection signal; and
a frequency combiner to combine the reference frequency and the selected one of the stepped frequencies to generate one of the plurality of heterodyne frequencies.

10. The receiver of claim 1 wherein the heterodyne frequency generator comprises:
15 a plurality of fixed-frequency voltage-controlled oscillators, each fixed-frequency voltage-controlled oscillator to generate a corresponding one of the plurality of heterodyne frequencies; and
a subchannel heterodyne switch to select a heterodyne frequency from one of the fixed-frequency voltage-controlled oscillators in response to a subchannel selection signal.

11. The receiver of claim 1 further comprising:
a plurality of subchannel analog-to-digital converters, the subchannel analog-to-
20 digital converters to receive an accumulated signal output from a corresponding one of the subchannel low-pass filters; and
a plurality of subchannel amplifiers to amplify the accumulated signal outputs
25 based on a gain control signal, the gain control signal being generated for each subchannel.

12. The receiver of claim 1 wherein the receiver further comprises radio-frequency circuitry to receive signals over a single subchannel comprising a plurality of spatial channels,

wherein the radio-frequency circuitry comprises an antenna selection switch to
5 select one of a plurality of antennas corresponding to one of the spatial channels,
wherein each subchannel low-pass filter corresponds to one of the spatial channels,
wherein the heterodyne frequency generator is to provide a single heterodyne frequency to convert radio-frequency signals of the single subchannel to baseband signals,
and

10 wherein the subchannel low-pass filters are to accumulate signal information for a corresponding one of the spatial channels.

13. The receiver of claim 12 further comprising:

a plurality of spatial channel analog-to-digital converters, the spatial channel analog-to-digital converters to receive an accumulated signal output from a corresponding
15 one of the subchannel low-pass filters; and

a digital signal processor to perform fast Fourier transforms on bit streams from the spatial channel analog-to-digital converters and to generate a parallel group of time-domain samples for each of a plurality of symbol-modulated subcarriers that comprise the single subchannel.

20 14. The receiver of claim 3 wherein the subchannels comprise a plurality of symbol-modulated orthogonal subcarriers, and

wherein each orthogonal subcarrier of a corresponding subchannel has a null at substantially a center frequency of other subcarriers of the corresponding subchannel.

15. The receiver of claim 14 wherein prior to reception by the receiver, the
25 subcarriers are to be individually modulated in accordance with an individual subcarrier modulation assignment comprising one of no modulation, binary phase shift keying (BPSK), quadrature phase shift keying (QPSK), 8PSK, 16-quadrature amplitude modulation (16-QAM), 32-QAM, 64-QAM, 128-QAM, and 256-QAM.

16. A method comprising:

accumulating signal information from a selected one of a plurality of subchannels during a filter-input sampling interval in an associated subchannel low-pass filter;

repeating the accumulating for others of the subchannels during the filter-input sampling interval; and

- 5 performing a fast Fourier transform on digital signals generated from the accumulated signal information from the plurality of subchannels to generate a received orthogonal frequency division multiplexed symbol.

17. The method of claim 16 further comprising:

- 10 providing a baseband signal to a selected one of a plurality of subchannel low-pass filters during the filter-input sampling interval;

providing, during the filter-input sampling interval, one of a plurality of heterodyne frequencies to convert a radio-frequency signal received within the selected subchannel to the baseband signal.

18. The method of claim 17 further comprising:

- 15 generating a subchannel selection signal to responsively provide one of the heterodyne frequencies to downconvert radio-frequency signals within a corresponding one of the subchannels within the filter-input sampling interval; and
switching between the subchannel low-pass filters in response to the subchannel selection signal.

- 20 19. The method of claim 18 wherein the subchannel selection signal is generated to provide the filter-input sampling interval at least as often as the inverse of a bandwidth of a subchannel.

20. The method of claim 18 further comprising:

- 25 receiving an accumulated signal output from a corresponding one of the subchannel low-pass filters; and
performing an analog-to-digital conversion on the accumulated signal output.

21. The method of claim 20 further comprising:

attenuating, in response to the subchannel selection signal, the radio-frequency signals to provide a normalized signal level for the selected subchannel filter and to perform an analog-to-digital conversion on the accumulated signal output.

22. The method of claim 17 further comprising:

5 generating a constant reference frequency;
 generating, with a digital synthesizer, a selected one of a plurality of stepped frequencies in response to a subchannel selection signal; and
 combining the reference frequency and the selected one of the stepped frequencies to generate one of the plurality of heterodyne frequencies.

23. The method of claim 17 further comprising:

10 performing individual analog-to-digital conversions on accumulated signal outputs from corresponding ones of the subchannel low-pass filters; and
 individually amplifying the accumulated signal outputs based on a gain control signal for each subchannel.

24. The method of claim 17 further comprising:

15 receiving, with a plurality of spatially diverse antennas, an orthogonal frequency division multiplexed symbol over a single subchannel comprising a plurality of spatial channels; and
 generating an antenna selection signal to select one of the antennas corresponding
20 to one of the spatial channels,
 wherein each subchannel low-pass filter corresponds to one of the spatial channels,
 wherein the heterodyne frequency generator provides a single heterodyne frequency to convert radio-frequency signals of the single subchannel to baseband signals,
 and
25 wherein the subchannel low-pass filters accumulate signals for a corresponding one of the spatial channels.

25. A system comprising:

a substantially omnidirectional antenna;

a subchannel filter selection switch to provide a baseband signal to a selected one of a plurality of subchannel low-pass filters; and

a heterodyne frequency generator to provide one of a plurality of heterodyne frequencies to convert a radio-frequency signal received within a selected subchannel to the baseband signal,

wherein the subchannel low-pass filters are to accumulate signal information from an associated one of a plurality of subchannels during a filter-input sampling interval.

26. The system of claim 25 further comprising a system controller to generate a subchannel selection signal for the subchannel selection switch and the heterodyne frequency generator,

wherein the selected one of the subchannel low-pass filters corresponds to the selected subchannel of the plurality of subchannels,

wherein the heterodyne frequency generator is responsive to the subchannel selection signal to generate one of the heterodyne frequencies to convert RF signals within a corresponding one of the subchannels within the filter-input sampling interval,

wherein the subchannel selection switch is responsive to the subchannel selection signal to switch between the subchannel low-pass filters, and

wherein the filter-input sampling interval is to occur at least as often as the inverse of a bandwidth of a subchannel.

27. The system of claim 26 further comprising:

a plurality of subchannel analog-to-digital converters, the subchannel analog-to-digital converters to receive an accumulated signal output from a corresponding one of the subchannel low-pass filters; and

an attenuator in a radio-frequency signal path responsive to the subchannel selection signal to attenuate the radio-frequency signal and provide a normalized signal level for the selected subchannel filter and a corresponding one of the subchannel analog-to-digital converters.

28. A machine-readable medium that provides instructions, which when executed by one or more processors, cause said processors to perform operations comprising:

accumulating signal information from one of a plurality of subchannels during a filter-input sampling interval in an associated subchannel low-pass filter;

5 repeating the accumulating for others of the subchannels during the filter-input sampling interval; and

performing a fast Fourier transform on digital signals generated from the accumulated signal information from the plurality of subchannels to generate a received orthogonal frequency division multiplexed symbol.

10 29. The machine-readable medium of claim 28 wherein the instructions, when further executed by one or more of said processors, cause said processors to perform operations further comprising:

providing a baseband signal to a selected one of a plurality of subchannel low-pass filters during the filter-input sampling interval;

15 providing, during the filter-input sampling interval, one of a plurality of heterodyne frequencies to convert a radio-frequency signal received within the selected subchannel to the baseband signal.

30. The machine-readable medium of claim 28 wherein the instructions, when further executed by one or more of said processors, cause said processors to perform operations further comprising:

20 generating a subchannel selection signal to responsively provide one of the heterodyne frequencies to downconvert radio-frequency signals within a corresponding one of the subchannels within the filter-input sampling interval; and

25 switching between the subchannel low-pass filters in response to the subchannel selection signal.

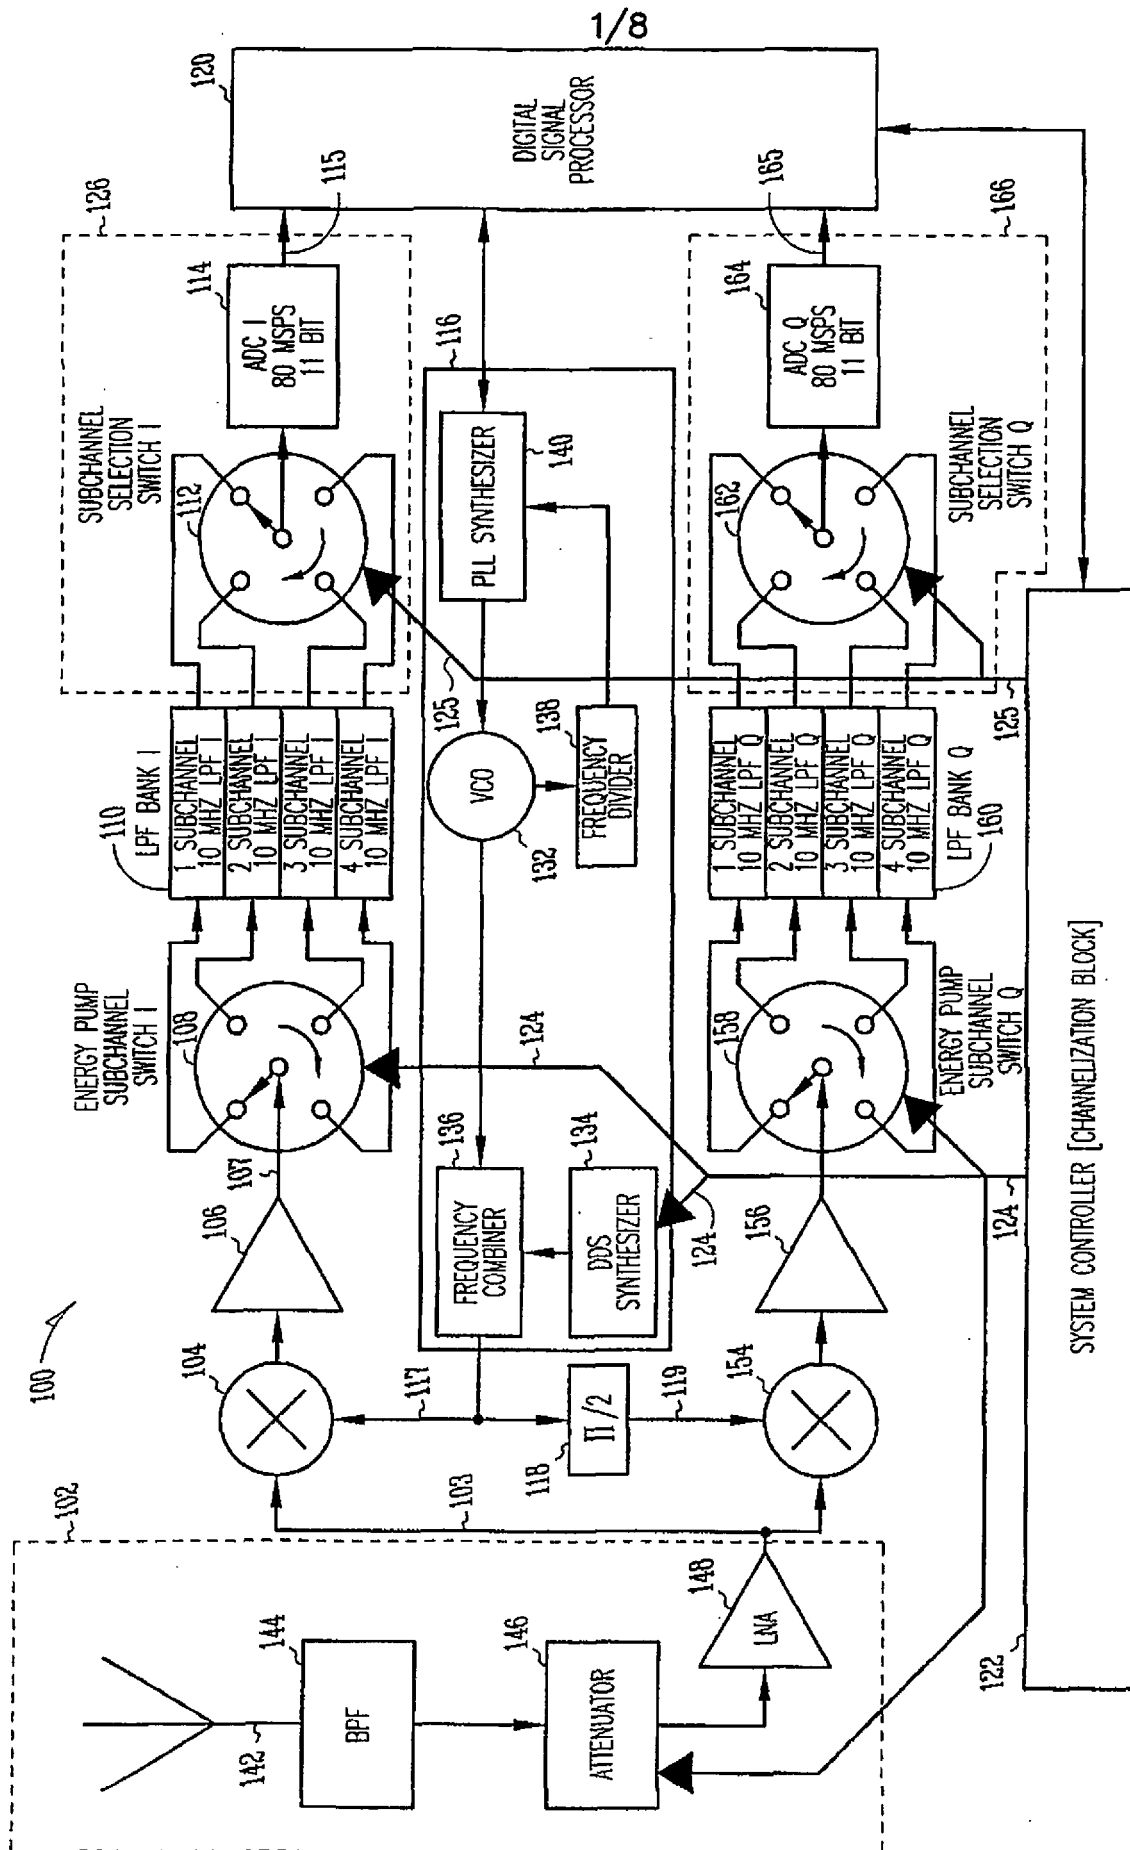


Fig. 1

2/8

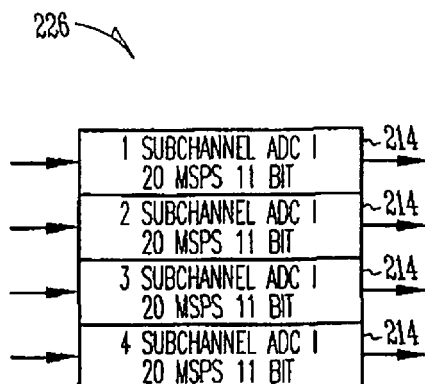


Fig. 2A

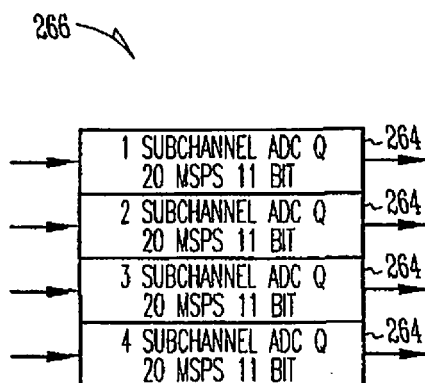


Fig. 2B

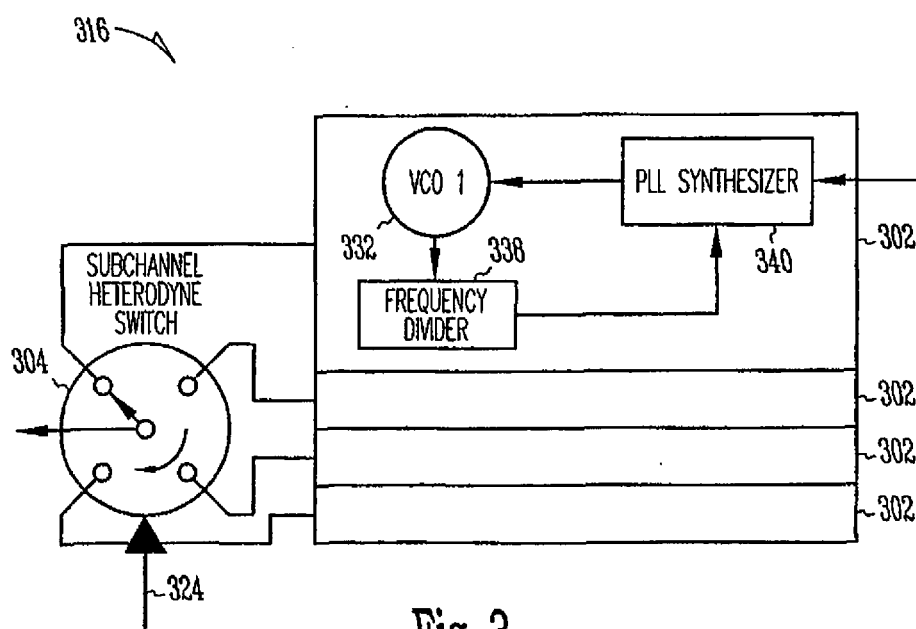


Fig. 3

3/8

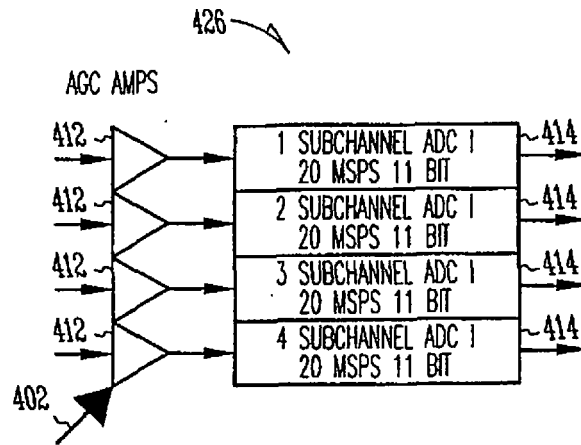


Fig. 4A

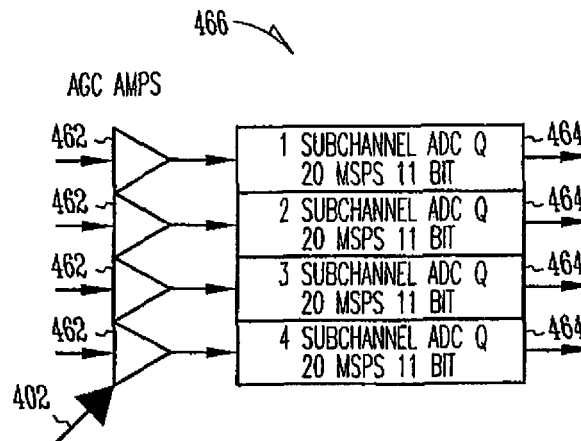


Fig. 4B

4/8

502

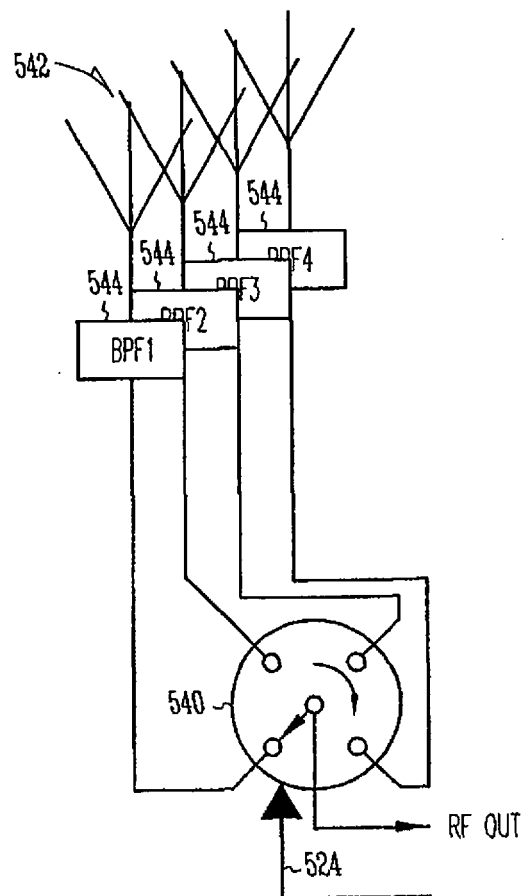


Fig. 5

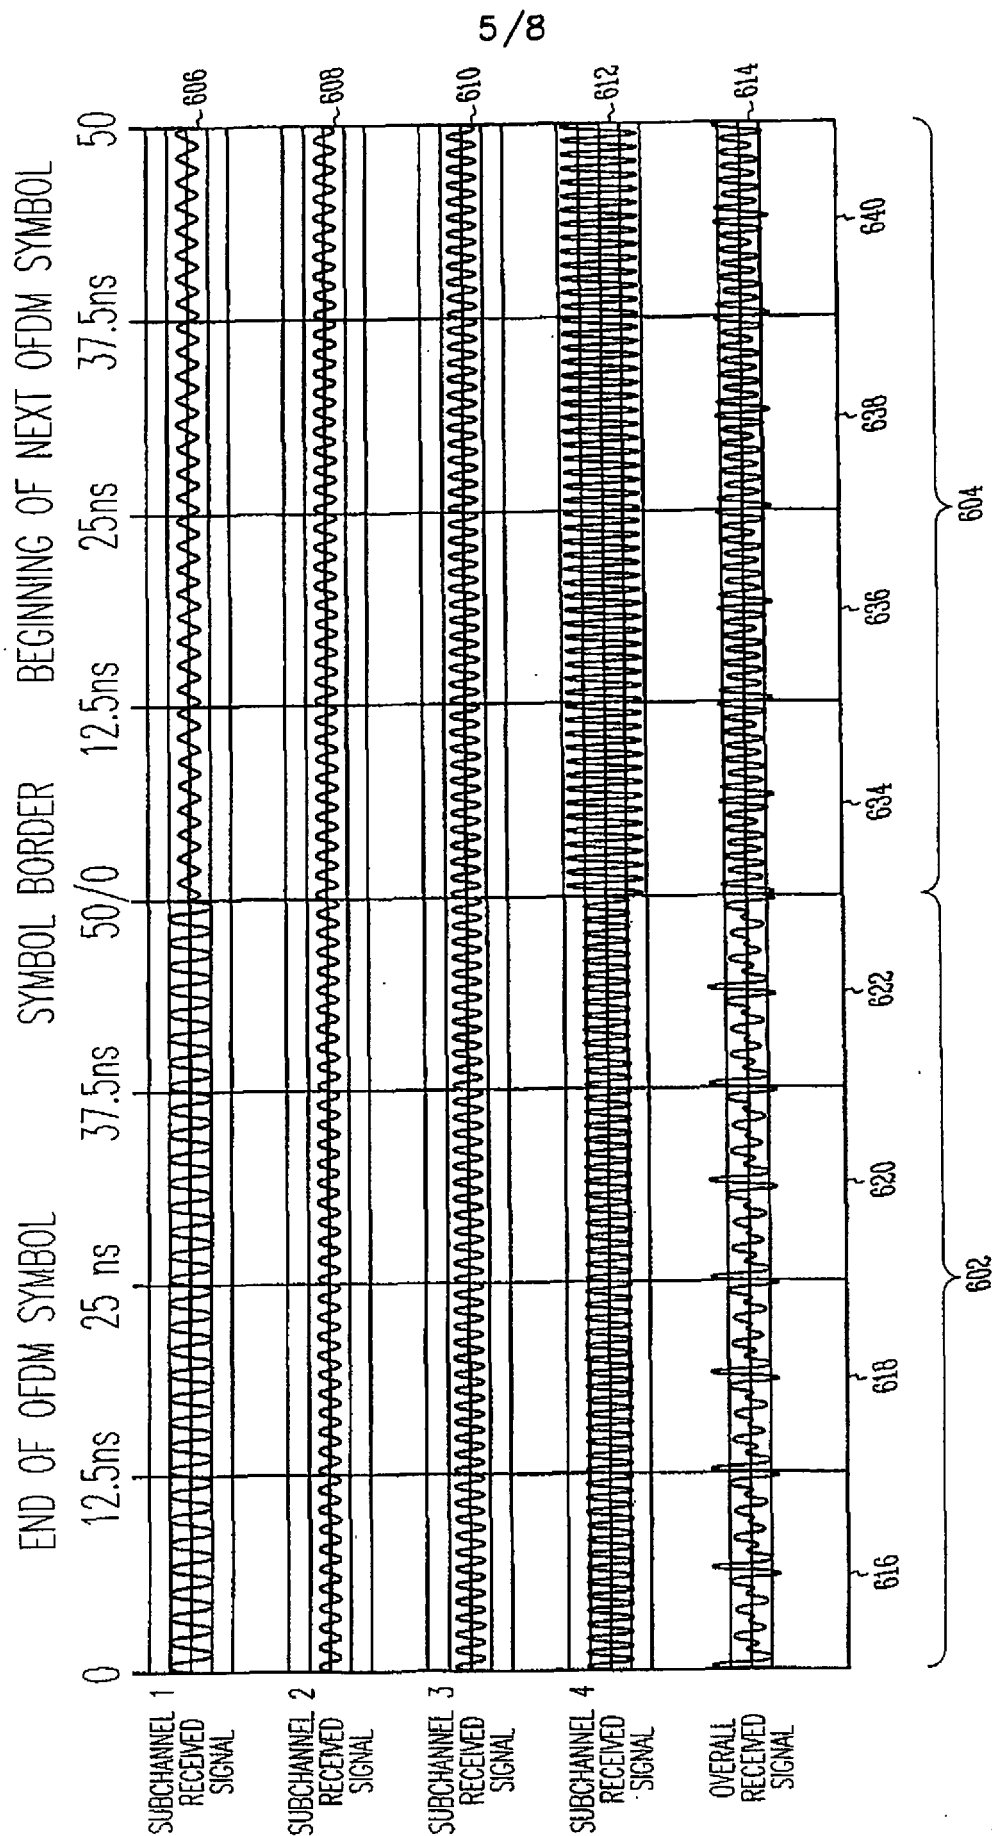


Fig. 6A

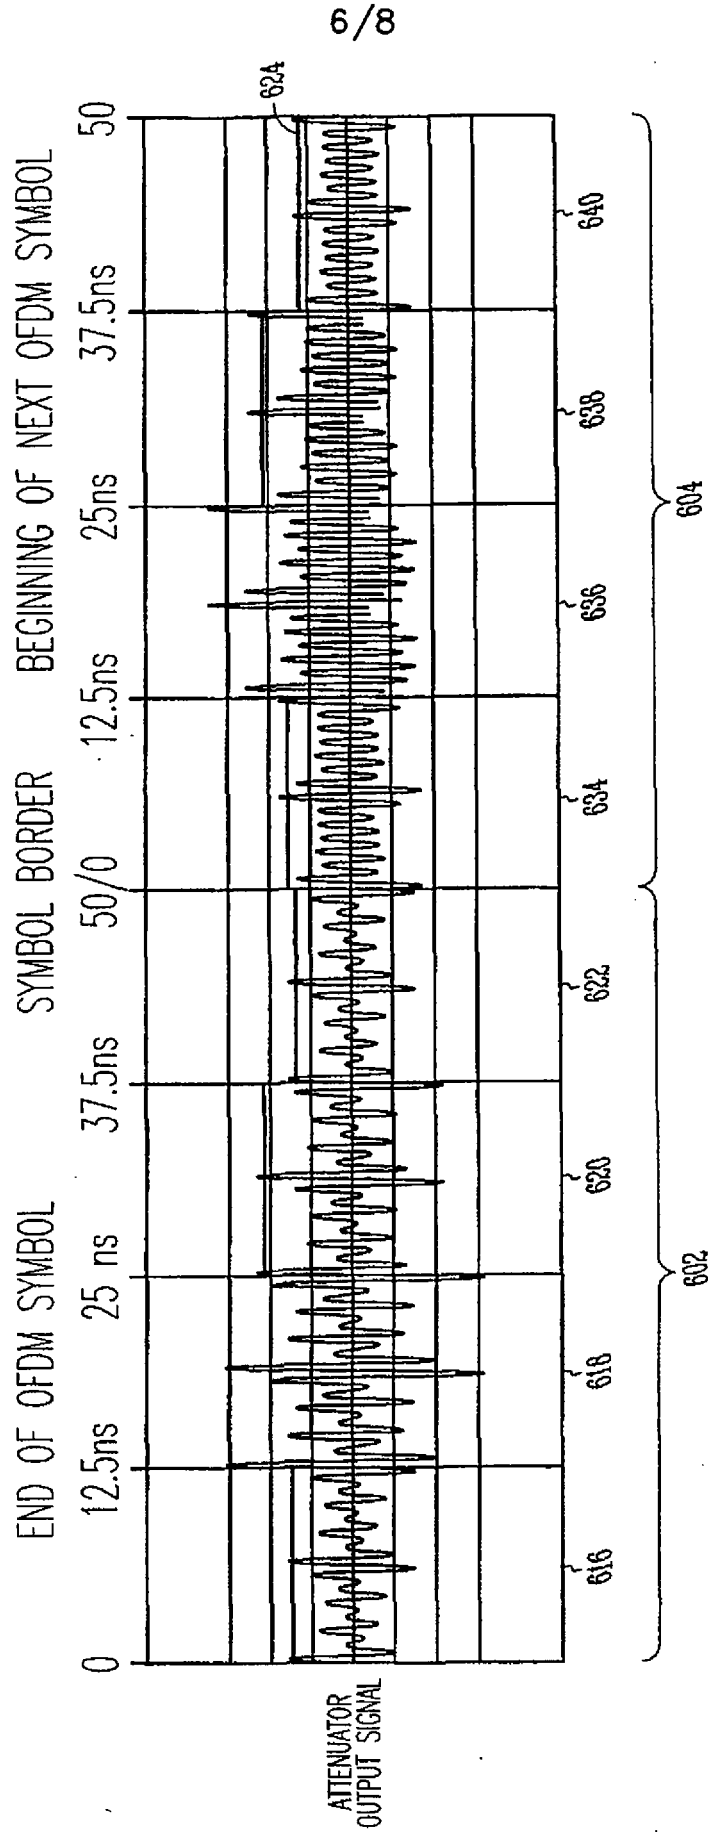


Fig. 6B

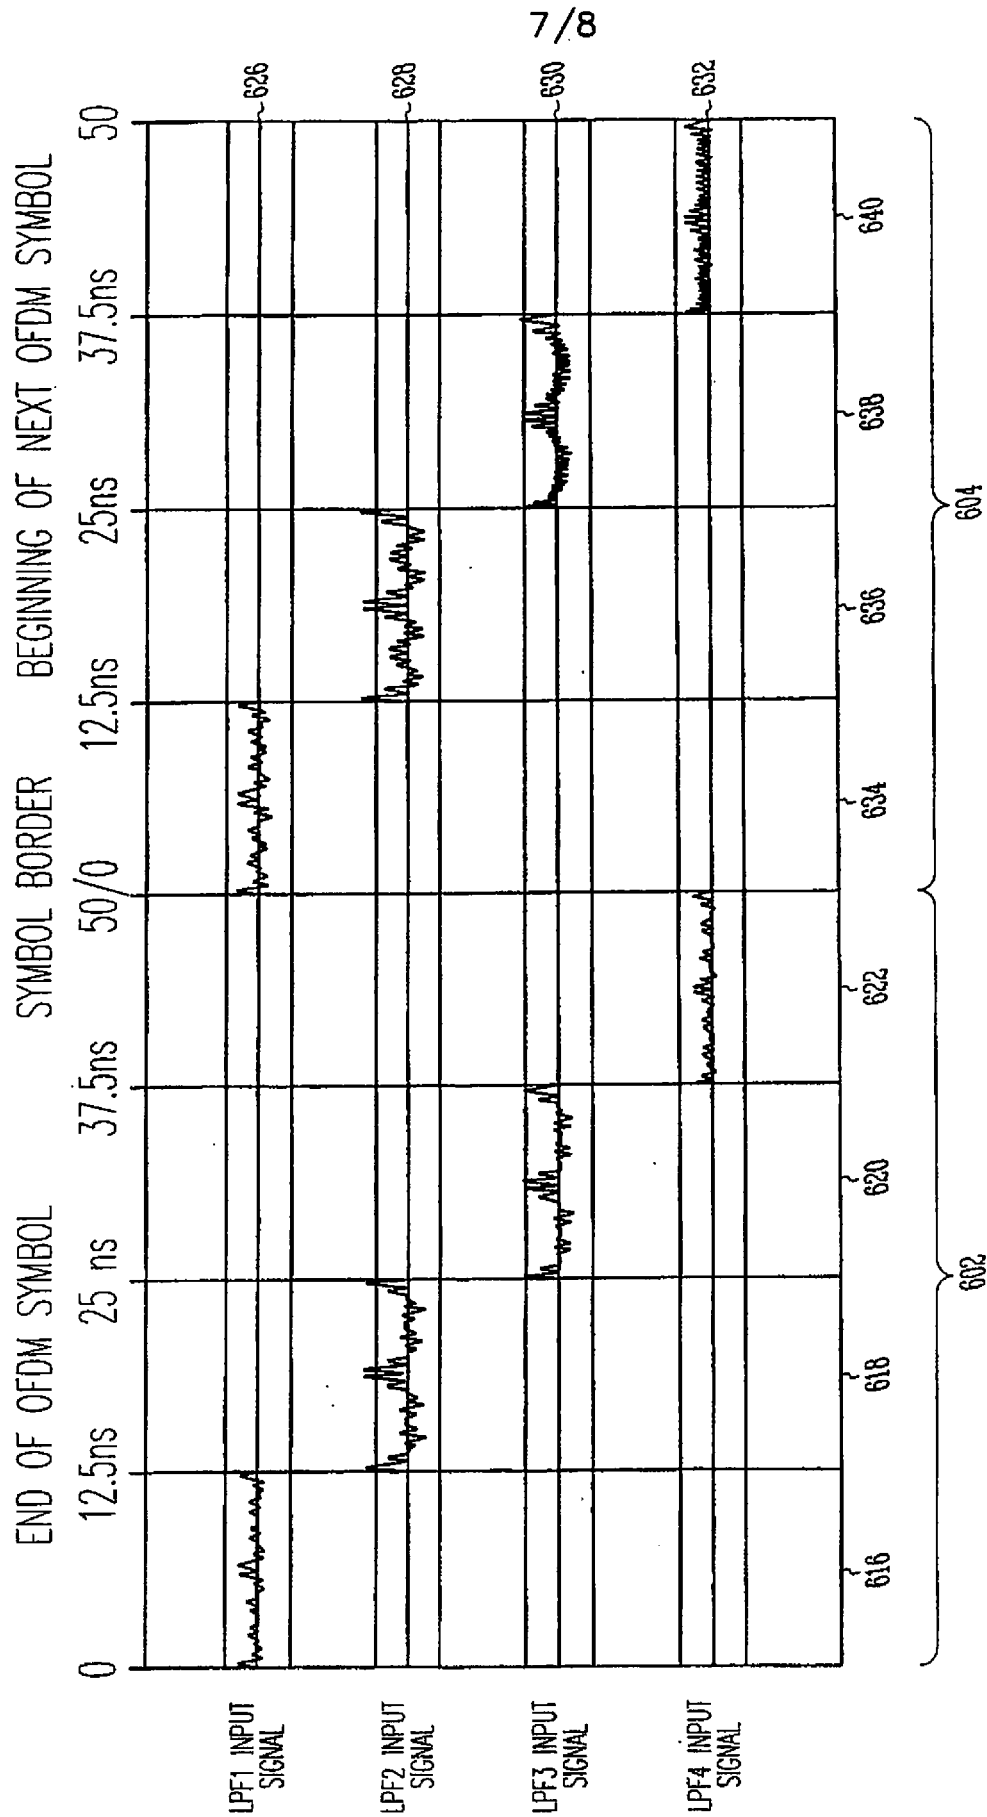


Fig. 6C

8/8

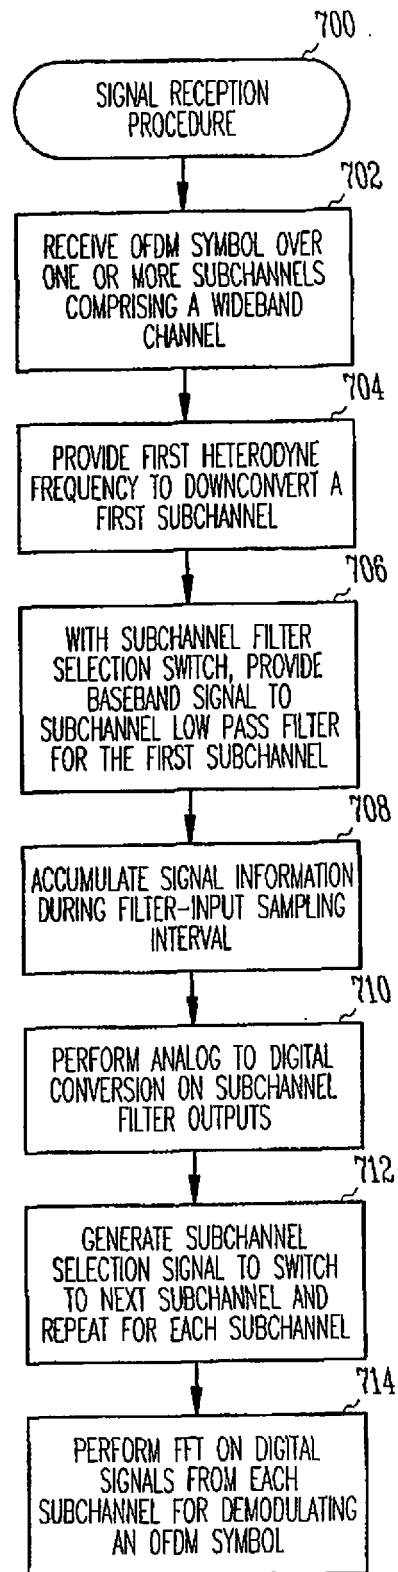


Fig. 7

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number
WO 2005/067246 A3

(51) International Patent Classification⁷: **H04L 27/26**

(21) International Application Number:
PCT/US2004/043042

(22) International Filing Date:
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/749,902 29 December 2003 (29.12.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MALTSEV, Alexander** [RU/RU]; Verhne-Pecherskaya Street, 1-7, Nizhny Novgorod, 603163 (RU). **SADRI, Ali** [US/US]; 11835 Carmel Mountain Road, Suite 1304-360, San Diego,

CA 92128 (US). **SERGEYEV, Sergey** [RU/RU]; Vaneeva Street, 19-28, Nizhny Novgorod, 603105 (RU). **BELONozHKIN, Alexander** [RU/RU]; N.V. Naberezhnaya Street, 1-16, Nizhny Novgorod, 603001 (RU). **SERGEYEV, Vadim** [RU/RU]; Vaneev Street, 19-28, Nizhny Novgorod, 603105 (RU).


(74) Agents: **STEFFEY, Charles, E.** et al.; Schwegman, Lundberg, Woessner & Kluth, P.A., P.O. Box 2938, Minneapolis, MN 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: QUASI-PARALLEL MULTICHANNEL RECEIVERS FOR WIDEBAND ORTHOGONAL FREQUENCY DIVISION MULTIPLEXED COMMUNICATIONS AND ASSOCIATED METHODS

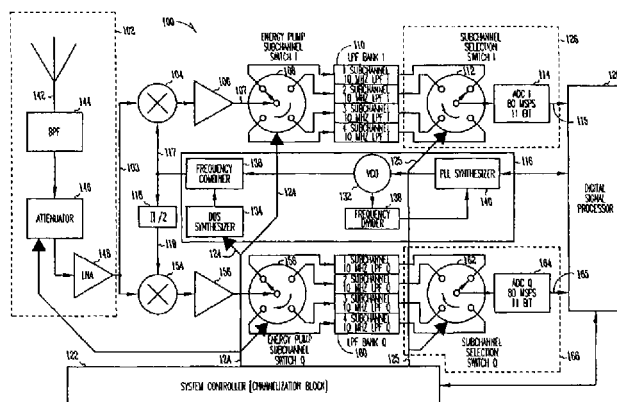

(57) Abstract: A quasi-parallel receiver may simultaneously receive signals within several subchannels that comprise a wideband channel. The receiver includes a subchannel filter selection switch that provides a baseband signal to a selected one of a plurality of subchannel low-pass filters. A heterodyne frequency generator provides one of a plurality of heterodyne frequencies to convert an RF signal received within a selected subchannel to the baseband signal. The subchannel low-pass filters accumulate signal information from an associated one of a plurality of subchannels during a filter-input sampling interval. In some embodiments, individual analog-to-digital converters receive the accumulated signal outputs from an associated subchannel filter and generate digital signals for a subsequent Fourier transformation. In some embodiments, a normalized signal output may be provided to the analog-to-digital converters, allowing the use of lower resolution analog-to-digital converters. The analog-to-digital converters may have sampling rates based on the subchannel bandwidth.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
10 November 2005

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2004/043042

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L27/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, IBM-TDB, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 613 975 A (AOYAGI ET AL) 23 September 1986 (1986-09-23) column 4, line 19 - line 25 -----	1-15, 25-27
A	US 2002/027950 A1 (MATTHEWS ADRIAN S) 7 March 2002 (2002-03-07) paragraph [0043] - paragraph [0044] -----	1-15, 25-27
A	US 5 106 192 A (TUCKER ET AL) 21 April 1992 (1992-04-21) column 6, line 30 - line 33 -----	1-15, 25-27

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 May 2005

Date of mailing of the international search report

12.08.2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Agudo Cortada, E

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2004/043042

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-15, 25-27

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-15, 25-27

receiver and a system for demodulating a signal transmitted through a plurality of carriers

2. claims: 16-24, 28-30

method and machine-readable medium for demodulating a signal composed of several OFDM symbols transmitted through different channels

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US2004/043042

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4613975	A	23-09-1986	JP 1031810 B	28-06-1989
			JP 1548094 C	09-03-1990
			JP 60047530 A	14-03-1985
			CA 1226347 A1	01-09-1987
			GB 2147177 A ,B	01-05-1985

US 2002027950	A1	07-03-2002	US 6400776 B1	04-06-2002

US 5106192	A	21-04-1992	AU 7870991 A	10-10-1991
			WO 9114188 A1	19-09-1991
